


# LEDWISE®

## 1700-AT788

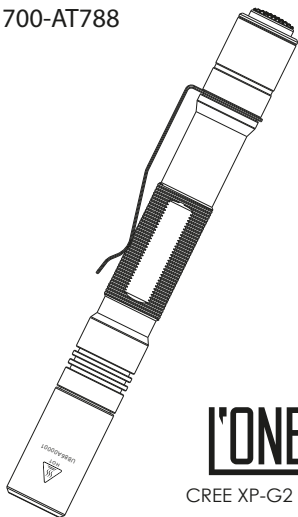

**L'ONE**  
CREE XP-G2 LED  
USER MANUAL

L'ONE is a pen light with tail-cap switch, using a CREE XP-G2 LED, and powered by 2 x AAA batteries (not included). The weight is only 31,2g but the max output can reach 200 lumens. It features 3 modes (high-medium-low) designed for outdoor sports and family travelling as a backup lighting gear. It is also ideal tool for workshop and industrial workers.

### Caution

- After using a long time, the light will be warm. This is normal and is not a defect.

### Features

- Uses Cree XP-G2 LED with lifespan of 50,000 hours
- Uses 2 x AAA (Ni-MH, alkaline) battery (not included)
- Ø 15mm x 129mm
- Weight: 31,2g excluding battery
- Maximum output of 200lm, 65m beam distance
- High-strength aerospace aluminum body
- Coated tempered resists impact class in high light transmittance
- Metal filmed reflector to create a high intensity beam
- Waterproof O-ring and gasget sealing
- Smart temperature control system assure stable output
- High, medium and low modes
- Removable pocket clip, nylon holster and lanyard cap
- IPX-8 water resistance, 1 meter impact resistance tested

### ANSI chart

FL1 STANDARD	HIGH	MEDIUM	LOW
Output (lumens)	200lm	75lm	10lm
Runtime (hours)	2h	8h	40h
Max light intensity (cd)	1,600cd		
Max range (meters)	65m		
Impact resistance (meters)	1m		
Waterproof rating	IPX8		

The above parameters are lab-tested with two AAA alkaline batteries. The data may vary due to different environments.

### Specification

- LED: 1 x Cree XP-G2
- Input 2.0Vdc-3.0Vdc
- Output: max 200 lumens
- Reflector: precise metal filmed
- Glass: filmed mineral glass
- Material: aluminum body
- Housing: premium hard-anodized anti-abrasive finish
- Switch: single tail switch
- Size: Ø 15mm x 129mm
- Weight: 31,2g (battery excluded)

### Accessories

Standard: removable pocket clip, lanyard, holster, spare O-ring and tail cap.

### Manual

#### Battery installation

Battery load: insert the 2 x AAA (Ni-MH, alkaline as illustrated (#1)).

#### On/off


Press the tail-cap switch to turn the light on, and then press the tail-cap switch again to turn the light off.

#### Different outputs switching

When the light is on, click the tail button, the light will be off. Click the button again; the light will go access to the next brightness level. With this operation, the light will cycle through the illumination modes in the following order: high-medium-low.

#### Tips

Using L'One in high mode for a long time will make its body hot. To avoid overheating, the temperature control system inside of flashlight will automatically make the light from high mode to the mid mod after 3 minutes of operating.

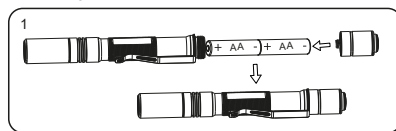

### Battery

AAA	2 x alkaline battery
AAA	2 x Ni-MH battery

### Store and maintenance

- Disassembling the sealed head or built-in battery will damage the lights and void the warranty.
- Store and keep the light from fire, statics, steaming and humidity surroundings.

### Warranty

- Two years warranty. Register your product at [www.thelights.fi](http://www.thelights.fi) - extended warranty of 5 years for registered products.

### The free warranty does not cover any damages or failure caused by:

- Normal wear
- Rough operation
- Improper operations
- Salt water and corrosive damage to the light



[www.thelights.fi](http://www.thelights.fi)

Importer:

Startax Finland Oy  
[www.startax.net](http://www.startax.net)

CE RoHS

[www.thelights.fi](http://www.thelights.fi)

[www.thelights.fi](http://www.thelights.fi)

说明:

1.展开尺寸为180\*90mm 折后尺寸为60\*90mm

2.印刷:橙色+黑色两色双面印刷

3.材质:128G铜版纸